


Voltage Controlled

Digital Delay Units

SERIES: DDU-75F

24 ns - 52 ns
Continuously Variable

data
delay
devices, inc. 






FEATURES:

- Completely interfaced with TTL & DTL application.
- No external components required.
- P.C. board space economy achieved.
- Fits standard 14 pins DIP socket.

SPECIFICATIONS:

- Delay range: 24 - 52 ns
- Control voltage: - .5 to - 15 Vdc
Continuous adjustment
- Control current: 1 ua approx.
- Temperature coefficient: 500 PPM/C
- Operating temperature: 0°C to 70°C
- Supply voltage: 5 Vdc \pm 5%
- Supply current: 40 ma
- Storage temperature: - 55°C to 125°C
- DC parameters: See TTL-Fast Schottky Logic Table on Page 6

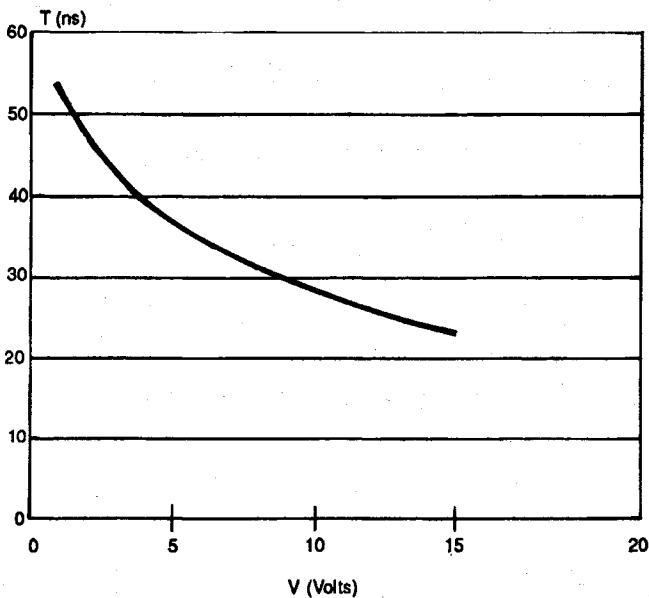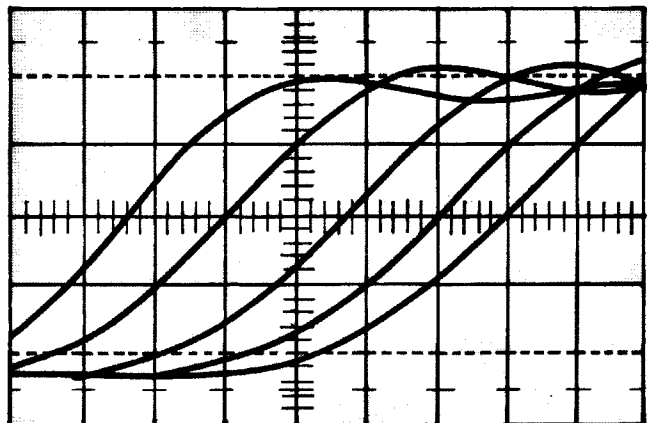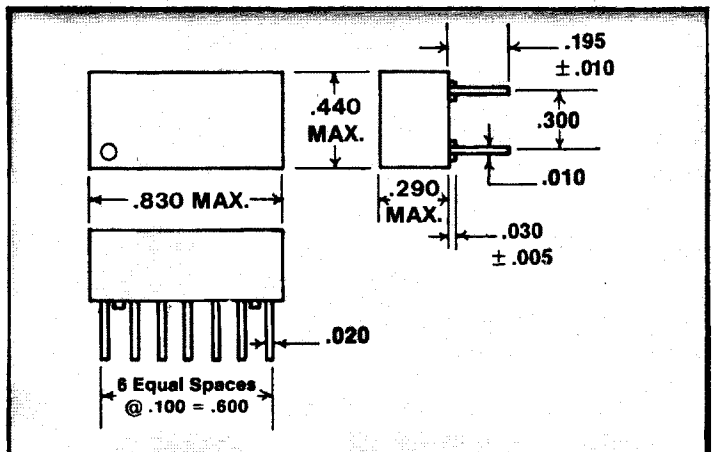

OTHER DELAYS UPON REQUEST.

